


# Self - Tapping Screw DIN7981 PAN PhHd

## SS304 - Type C

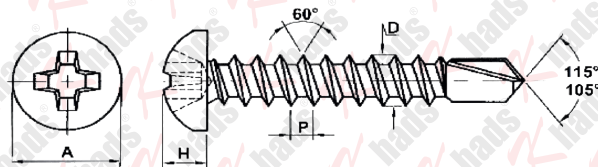

**Material: Stainless Steel 304 (A2)**

SIZES	A	H	P	D	Driver PH	Breaking Torque
	Head Dia	Head Height	Pitch	Major Dia		
#4 x 1/2" (M2.9 x 13)	5.3-5.6	1.95-2.2	1.1	2.76-2.9	1	1N.m
#4 x 5/8" (M2.9 x 16)						
#4 x 3/4" (M2.9 x 19)						
#4 x 1" (M2.9 x 25)						
#6 x 3/8" (M3.5 x 10)	6.54-6.9	2.35-2.6	1.3	3.35-3.53	2	1.7N.m
#6 x 1/2" (M3.5 x 13)						
#6 x 5/8" (M3.5 x 16)						
#6 x 3/4" (M3.5 x 19)						
#6 x 1" (M3.5 x 25)						
#8 x 3/8" (M4.2 x 10)	7.84-8.2	2.75-3.05	1.4	4.04-4.2	2	2.8N.m
#8 x 5/8" (M4.2 x 16)						
#8 x 3/4" (M4.2 x 19)						
#8 x 1" (M4.2 x 25)						
#8 x 1.1/4" (M4.2 x 32)						
#8 x 1.1/2" (M4.2 x 38)						
#8 x 2" (M4.2 x 50)						
#10 x 1/2" (M4.8 x 13)	9.14-9.5	3.25-3.55	1.6	4.62-4.8	2	4.4N.m
#10 x 5/8" (M4.8 x 16)						
#10 x 3/4" (M4.8 x 19)						
#10 x 1" (M4.8 x 25)						
#10 x 1.1/4" (M4.8 x 32)						
#10 x 1.1/2" (M4.8 x 38)						
#10 x 2" (M4.8 x 50)						