


Self - Tapping Screw DIN7982 CSK PhHd SS304 - Type C

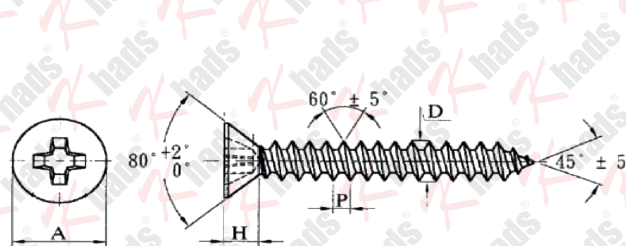

Material: Stainless Steel 304 (A2)

SIZES	A	H	P	D	Driver PH	Breaking Torque	Item Code
#4 x 3/8" (M2.9 x 10)	5.2-5.5	1.70	1.1	2.76-2.9	1	1N.m	STSA2C29010
#4 x 1/2" (M2.9 x 13)							STSA2C29013
#4 x 5/8" (M2.9 x 16)							STSA2C29016
#4 x 3/4" (M2.9 x 19)							STSA2C29019
#4 x 1" (M2.9 x 25)							STSA2C29025
#6 x 1/2" (M3.5 x 13)	6.44-6.8	2.10	1.3	3.35-3.53	2	1.7N.m	STSA2C35013
#6 x 5/8" (M3.5 x 16)							STSA2C35016
#6 x 3/4" (M3.5 x 19)							STSA2C35019
#6 x 1" (M3.5 x 25)							STSA2C35025
#8 x 1/2" (M4.2 x 13)	7.74-8.1	2.50	1.4	4.04-4.22	2	2.8N.m	STSA2C42013
#8 x 5/8" (M4.2 x 16)							STSA2C42016
#8 x 3/4" (M4.2 x 19)							STSA2C42019
#8 x 1" (M4.2 x 25)							STSA2C42025
#8 x 1.1/4" (M4.2 x 32)							STSA2C42032
#8 x 1.1/2" (M4.2 x 38)							STSA2C42038
#8 x 2" (M4.2 x 50)							STSA2C42050
#10 x 1/2" (M4.8 x 13)	9.14-9.5	3	1.6	4.62-4.8	2	4.4N.m	STSA2C48013
#10 x 3/4" (M4.8 x 19)							STSA2C48019
#10 x 1" (M4.8 x 25)							STSA2C48025
#10 x 1.1/4" (M4.8 x 32)							STSA2C48032
#10 x 1.1/2" (M4.8 x 38)							STSA2C48038
#10 x 2" (M4.8 x 50)							STSA2C48050